


# DABLIU Video Wall Displays

LED backlight technology for an  
unprecedented viewing experience

Ultra-thin bezel design!

Mod. V55W35

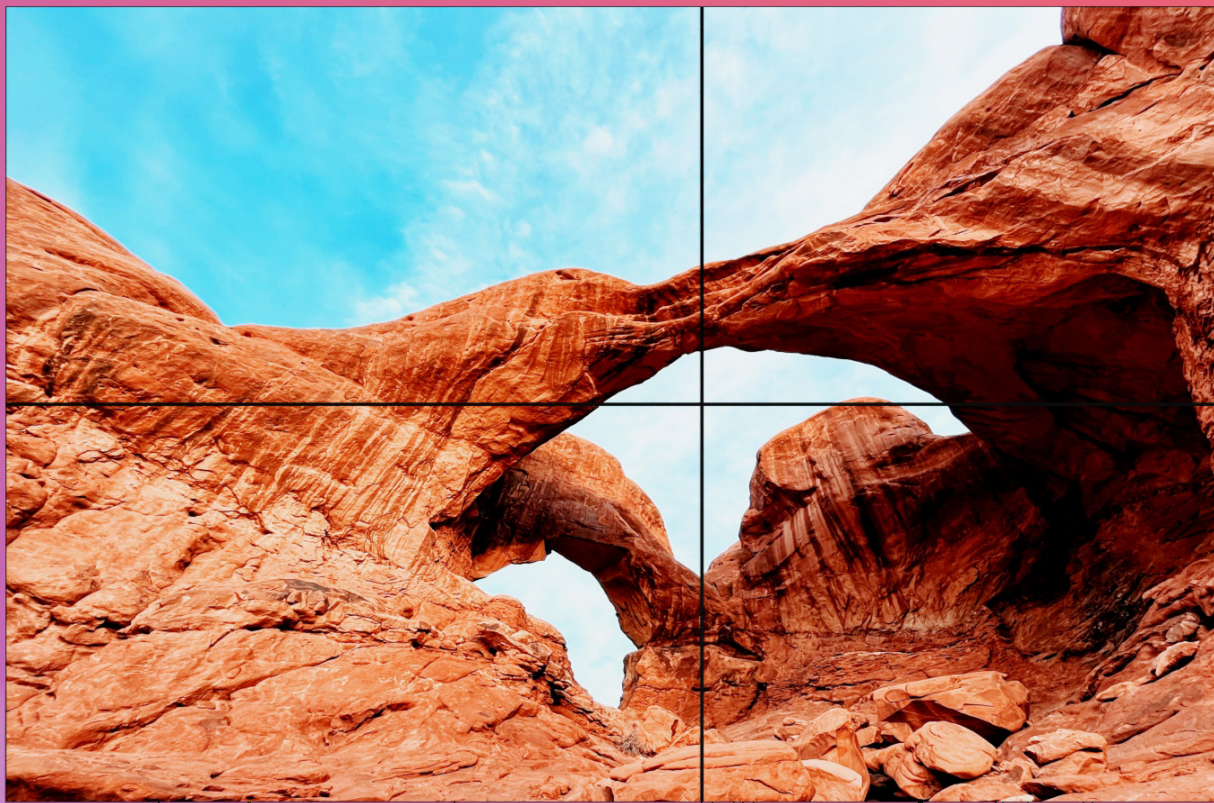

 wacebo



## Business applications



**Sharp details & immersive visuals!**




# Wide viewing angles, images that captivate the viewer

Wherever the display is placed,  
the audience can enjoy sharp, immersive details from any angle!



## Exceptionally dynamic visuals

The images are presented in an **elaborated and realistic way**, ensuring **incredibly high quality**. The sensational 55" LCD panel is **suitable for a variety of settings**, from advertising to commercial use, in conference rooms, hotels, stations, and more!

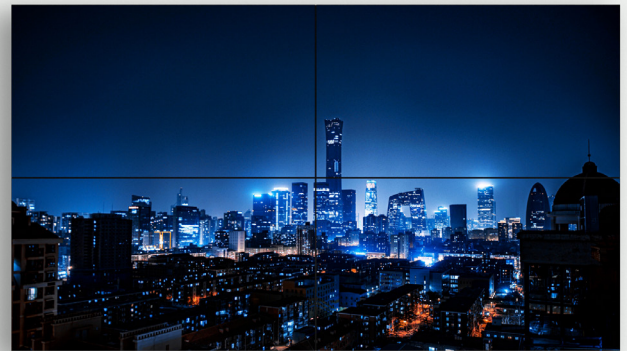


## Lifelike image quality

The **color optimization** function enhances color and black purity for a **lifelike viewing experience**. It ensures uniform colors and brightness under any lighting condition, captivating the viewer with stunning images!



A new way to make commercial spaces come to life!

## **Total immersion in visuals**

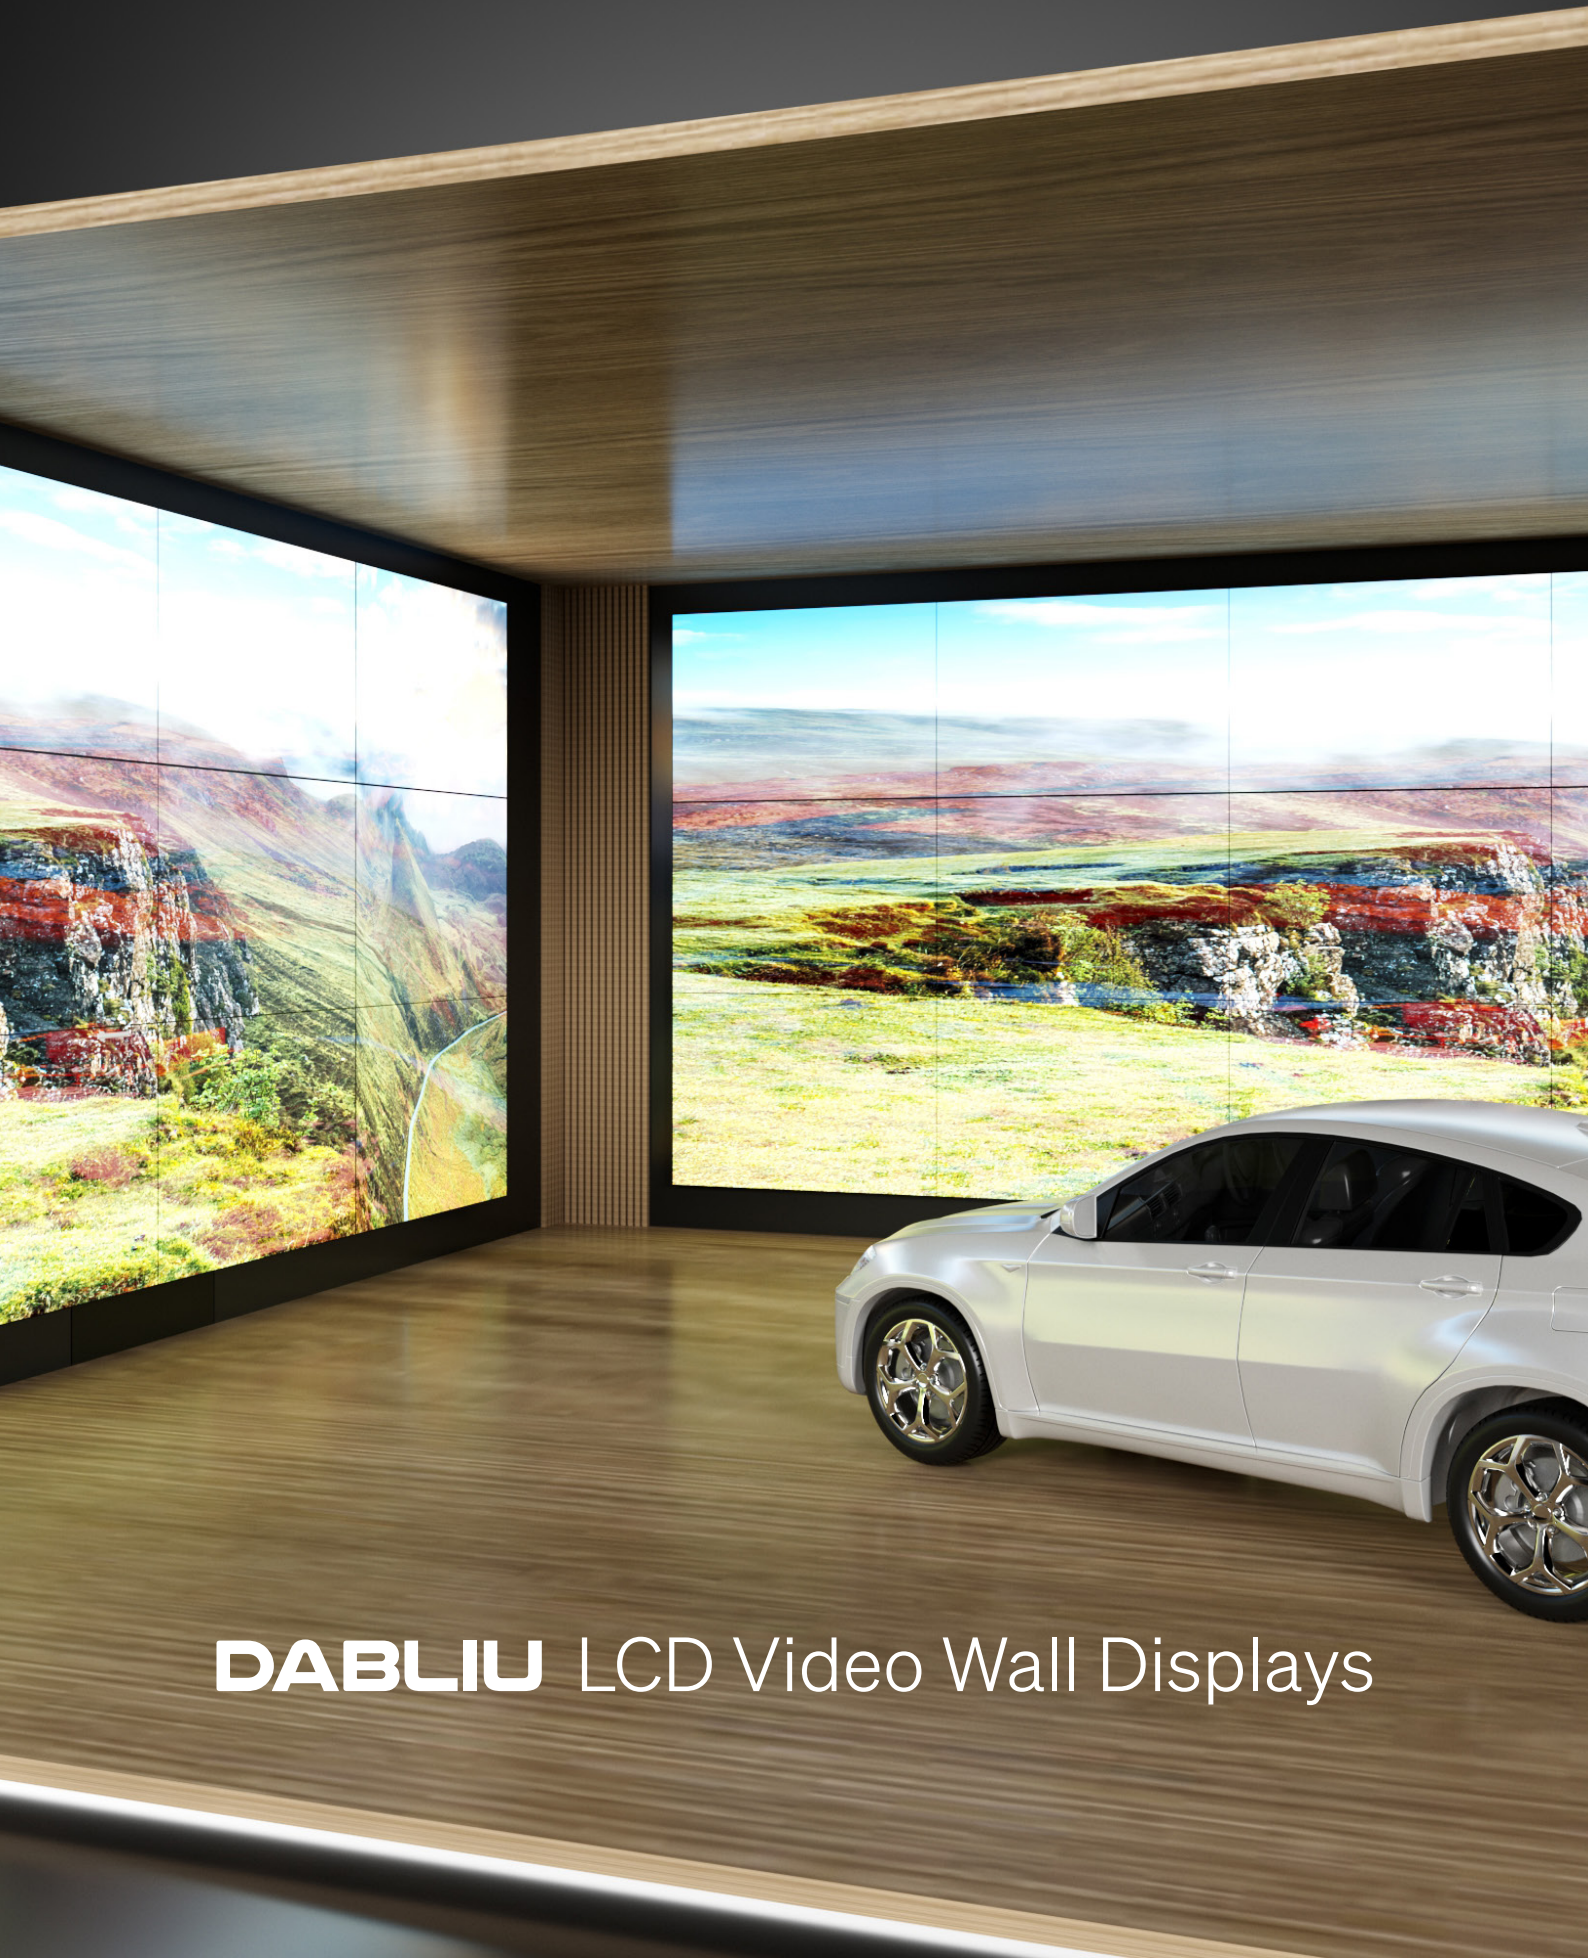

**DABLIU** LCD Video Wall Displays






## Ultra-thin bezel

The ultra-thin **3.5 mm bezel** creates an immersive environment and delivers a seamlessly integrated viewing experience across multiple assembled screens. The **metal shell** is durable yet easy to install.

## The display presents a single image that captivates every viewer!

With its unique **LED backlight technology** and **ultra-thin bezel design**, this display **maximizes the viewing area**, ensuring a **complete image**, an **expanded field of view**, and a **flawless visual presentation**.

## Connectivity

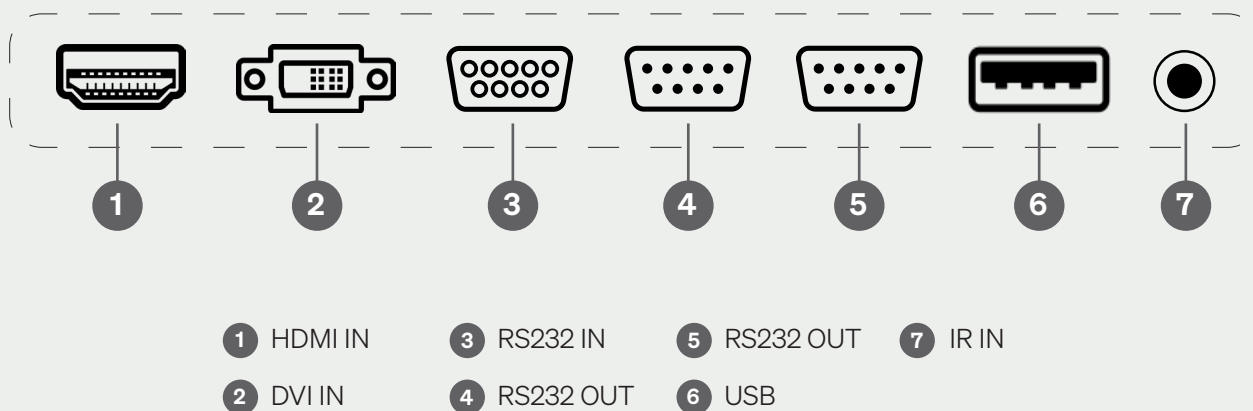

# Make meetings and presentations unforgettable





# DABLIU LCD Video Wall Displays

## Technical specs - Mod. V55W35



### Display

LCD size	55"
Display lighting	LED backlighting
Resolution	1920 × 1080 pixel
Brightness	500cd/m² (typ.)
Contrast	4000:1 (typ.)
Pixel pitch	0.630x0.630 mm
Frequency	60 Hz
Viewing angle	178°(H)/178°(V)
Service life	50,000hrs(min.)
Color saturation	72%
Display area	1209.6(H)mm x 680.4(V)mm
Colors	1.07 Billion



### Environmental data

Operating temperature	0°C ~ 40°C
Storage temperature	20°C ~ 60°C
Operating humidity	10% to 90% without condensation
Operating humidity	10% to 85% without condensation



### Power supply

Power	100~240V,50~60Hz
Max power consumption	< 160W
Standby consumption	< 0.5 W




### Accessories

Power supply cable	1
Rs232 Connect Line	1
RJ45 to RS232 interface socket	< 0.5 W
Remote control receiver	1
Remote controller	1



### Framework

Gross weight	22 KG
Video Wall dimensions	1214.2(H)×684.7(V)X133.9(D)mm
Packaging dimensions	1300×770×30mm
Shell material	Metal
Shell color	Black
Shell thickness	3,5 mm
Wall reinforcement	4-M6 screws, 580 x460mm

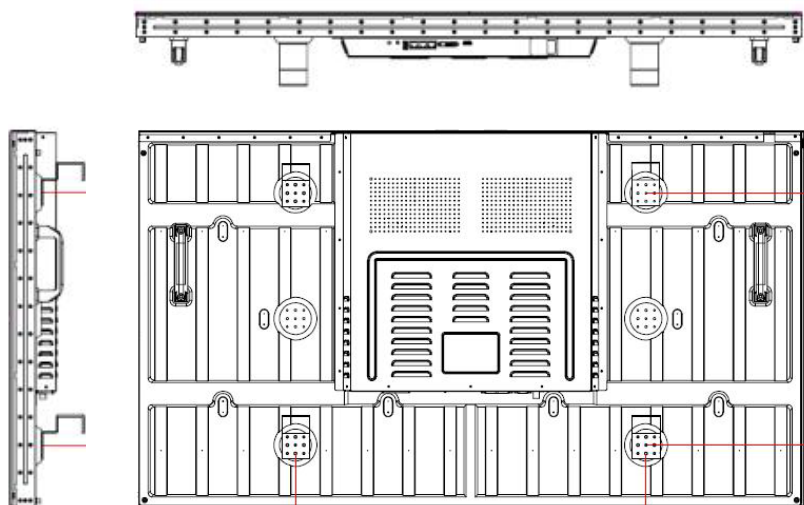



Viale Gianluigi Bonelli, 40 | 00127 Rome (RM) | ITALY

Tel. (+39) 06.98383431 | Fax (+39) 06.98383432

[commerciale@waceboeurope.com](mailto:commerciale@waceboeurope.com) | [www.waceboeurope.com](http://www.waceboeurope.com)